

## SPECIAL OFFER – 40-60% DISCOUNT

Please contact Lacuna direct if you are interested in one or more of the doors beneath.

All doors are new, flat packed, and can be delivered in a matter of days.

A £400 carriage charge will be added per order/delivery. This covers export packaging, transport, transport insurance and delivery with tail lift.


The specification is written under the door drawings, and there is further information and sectional drawings on the last pages of this document, but don't hesitate to contact us if you need any further information.

20 06 2018

Invoice address: TBC

Delivery address: TBC

### FD1

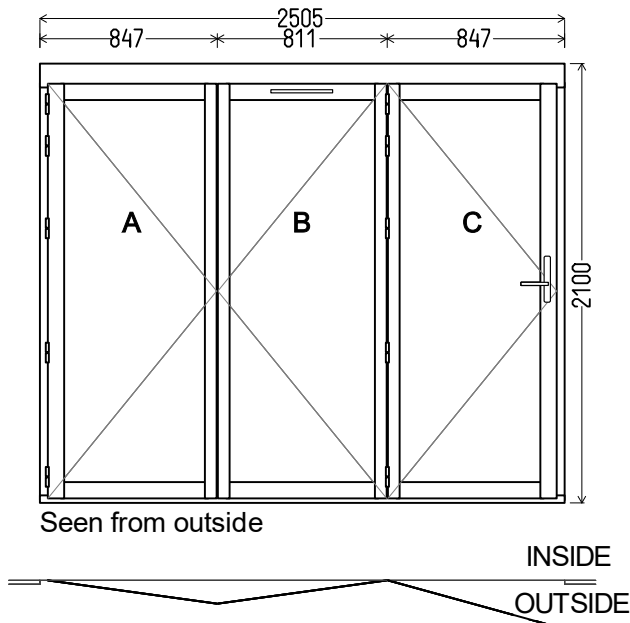


Dimensions	m <sup>2</sup>	Weight	Pcs.	Price, GBP	Total excl VAT, GBP
2505x2100mm	5.26	198 kg	1	3,461.87	40% discount 2,077.12

<b>Type:</b>	Outward folding door Seen from outside, all 3 leaves open from right to left Seen from outside, the first leaf from right is the master door
<b>Wood:</b>	Heat-treated beech. Class 1, durability equal to teak
<b>Top frame:</b>	Fibre supported frame top 114x116mm.
<b>Threshold:</b>	36mm mahogany threshold, Oiled
<b>Surface treatment:</b>	Outside: White RAL 9010 Inside: White RAL 9010
<b>Handle, fittings:</b>	(70) Double handle with key lock on the inside, outwards going door Trickle vent (10x300mm ea.) 3000 mm <sup>2</sup>
<b>Glass:</b>	4H+18+33.1 (2 layer low E, toughened+laminated, Ug=1.13) black warm-edge


Uw: 1.19 W/m<sup>2</sup>K, Eref: -14.60 kWh/m<sup>2</sup>, LT: 81%, g: 65%, Glass percent: 73%.

Lacuna UK and Ireland Ltd,  
Delta 5a, Masterlord Office Village, West Road, Ipswich, IP3 9FH  
E: Info@lacuna-bifold.co.uk - W: lacuna-bifold.co.uk - T44 (0) 3300 010 552  
Company reg, number: 9887949 - Vat reg, number: 231 1282 55

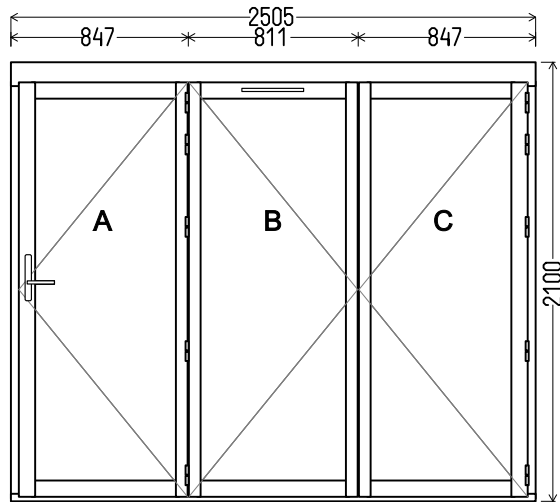

**FD2**


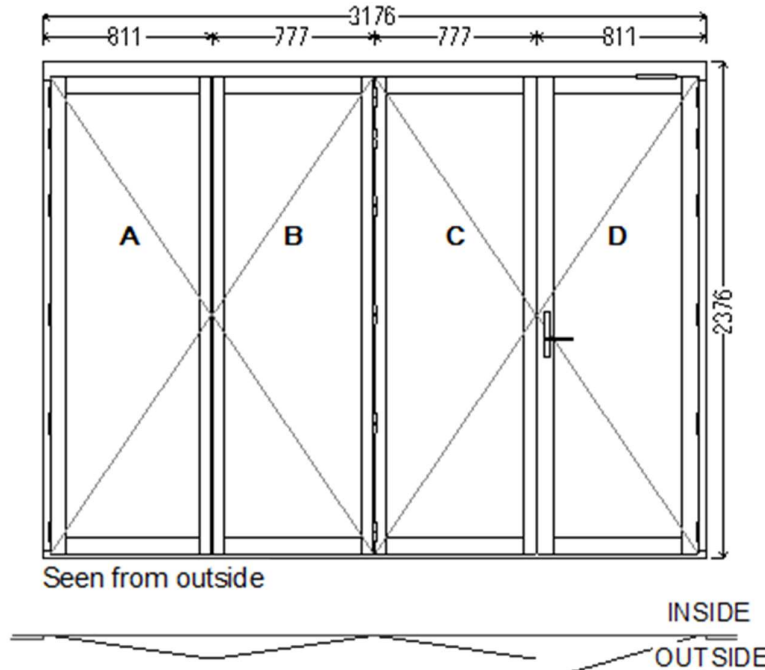
Seen from outside



Dimensions	m <sup>2</sup>	Weight	Pcs.	Price, GBP	Total excl VAT, GBP	
2505x2100mm	5.26	198 kg	1	3,461.86	40% discount	2,077.12

<b>Type:</b>	Outward folding door Seen from outside, all 3 leaves open from left to right Seen from outside, the first leaf from left is the master door
<b>Wood:</b>	Heat-treated beech. Class 1, durability equal to teak
<b>Top frame:</b>	Fibre supported frame top 114x116mm.
<b>Threshold:</b>	36mm mahogany threshold, Oiled
<b>Surface treatment:</b>	Outside: White RAL 9010 Inside: White RAL 9010
<b>Handle, fittings:</b>	(70) Double handle with key lock on the inside, outwards going door Trickle vent (10x300mm ea.) 3000 mm <sup>2</sup>
<b>Glass:</b>	4H+18+33.1 (2 layer low E, toughened+laminated, Ug=1.13) black warm-edge Uw: 1.19 W/m <sup>2</sup> K, Eref: -14.60 kWh/m <sup>2</sup> , LT: 81%, g: 65%, Glass percent: 73%.

## FD3



Dimensions	m <sup>2</sup>	Weight	Pcs.	Price, GBP	Total excl VAT, GBP
3176x2376mm	7.55	298 kg	1	4,669.45	60% discount 1,867.78
<b>Type:</b>	Outward folding door Seen from outside, 3 leaves open from right to left and 1 leaf opens right Seen from outside, the first leaf from right is the master door The slave leaf will have to be opened using shootbolts in top and bottom				
<b>Wood:</b>	Heat-treated beech. Class 1, durability equal to teak				
<b>Top frame:</b>	Frame top 90x116mm.				
<b>Threshold:</b>	36mm mahogany threshold, Oiled				
<b>Surface treatment:</b>	Outside: Painted RAL 7011 Inside: White RAL 9010				
<b>Handle, fittings:</b>	(40) Double handle with thumb turn on the inside, outwards going door Friction brake on master leaf				
<b>Glass:</b>	33.2+16+33.2 (2 layer low E, laminated 2 sides, Ug=1.1) black warm-edge Uw: 1.17 W/m <sup>2</sup> K, Eref: -16.67 kWh/m <sup>2</sup> , LT: 80%, g: 61%, Glass percent: 75%.				

Please note this quote is valid 30 days from date of issue. Due to the current currency volatility, we reserve the right to adjust the quote if pound Sterling falls significantly against Danish kroner.

FD1 & FD2: 90 MM TOP FRAME WITH INTEGRATED SLIDING RAIL

The chosen solution is a top frame with integrated sliding rail in the top frame.

FD3: 114 MM FIBRE SUPPORTED TOP FRAME

The selected option is supplied with a fibre supported top frame. Due to e.g high winds, the top frame still need to be attached to the structure above the door.

36 MM CILL

The standard threshold is 36 mm. For outwards opening doors, a bottom roller will be located on the external side of the threshold, and for inwards opening doors it will be located internally.

Each door leaf can weigh up to 80 kg., and unless you choose a fiber-reinforced top frame, the structure above the door must be able to carry up to 100 kg. per. linear meter opening having a maximum deflection of 2 mm in total. However, most door leaves weigh, about 40-50 kg., which reduces the load on the structure above the folding door considerably.


Please note that Lacuna in quotations and order confirmations refers to the overall frame size. Clearance widths are not considered by Lacuna, as they can vary between projects, however Lacuna strongly recommends a minimum of 12 mm clearance on all 4 sides for installation and adjustment. Lacuna is only liable for keeping the overall frame size within +/- 2 mm.

The Lacuna product(s) are supplied disassembled and can in most cases be handled by two persons without further help.

The installation should be in accordance with the installation guides and should be made by qualified installers.

Please contact Lacuna if you have any questions with regards to installation, choice of top frame or threshold, or have other questions.

FD1 & FD2

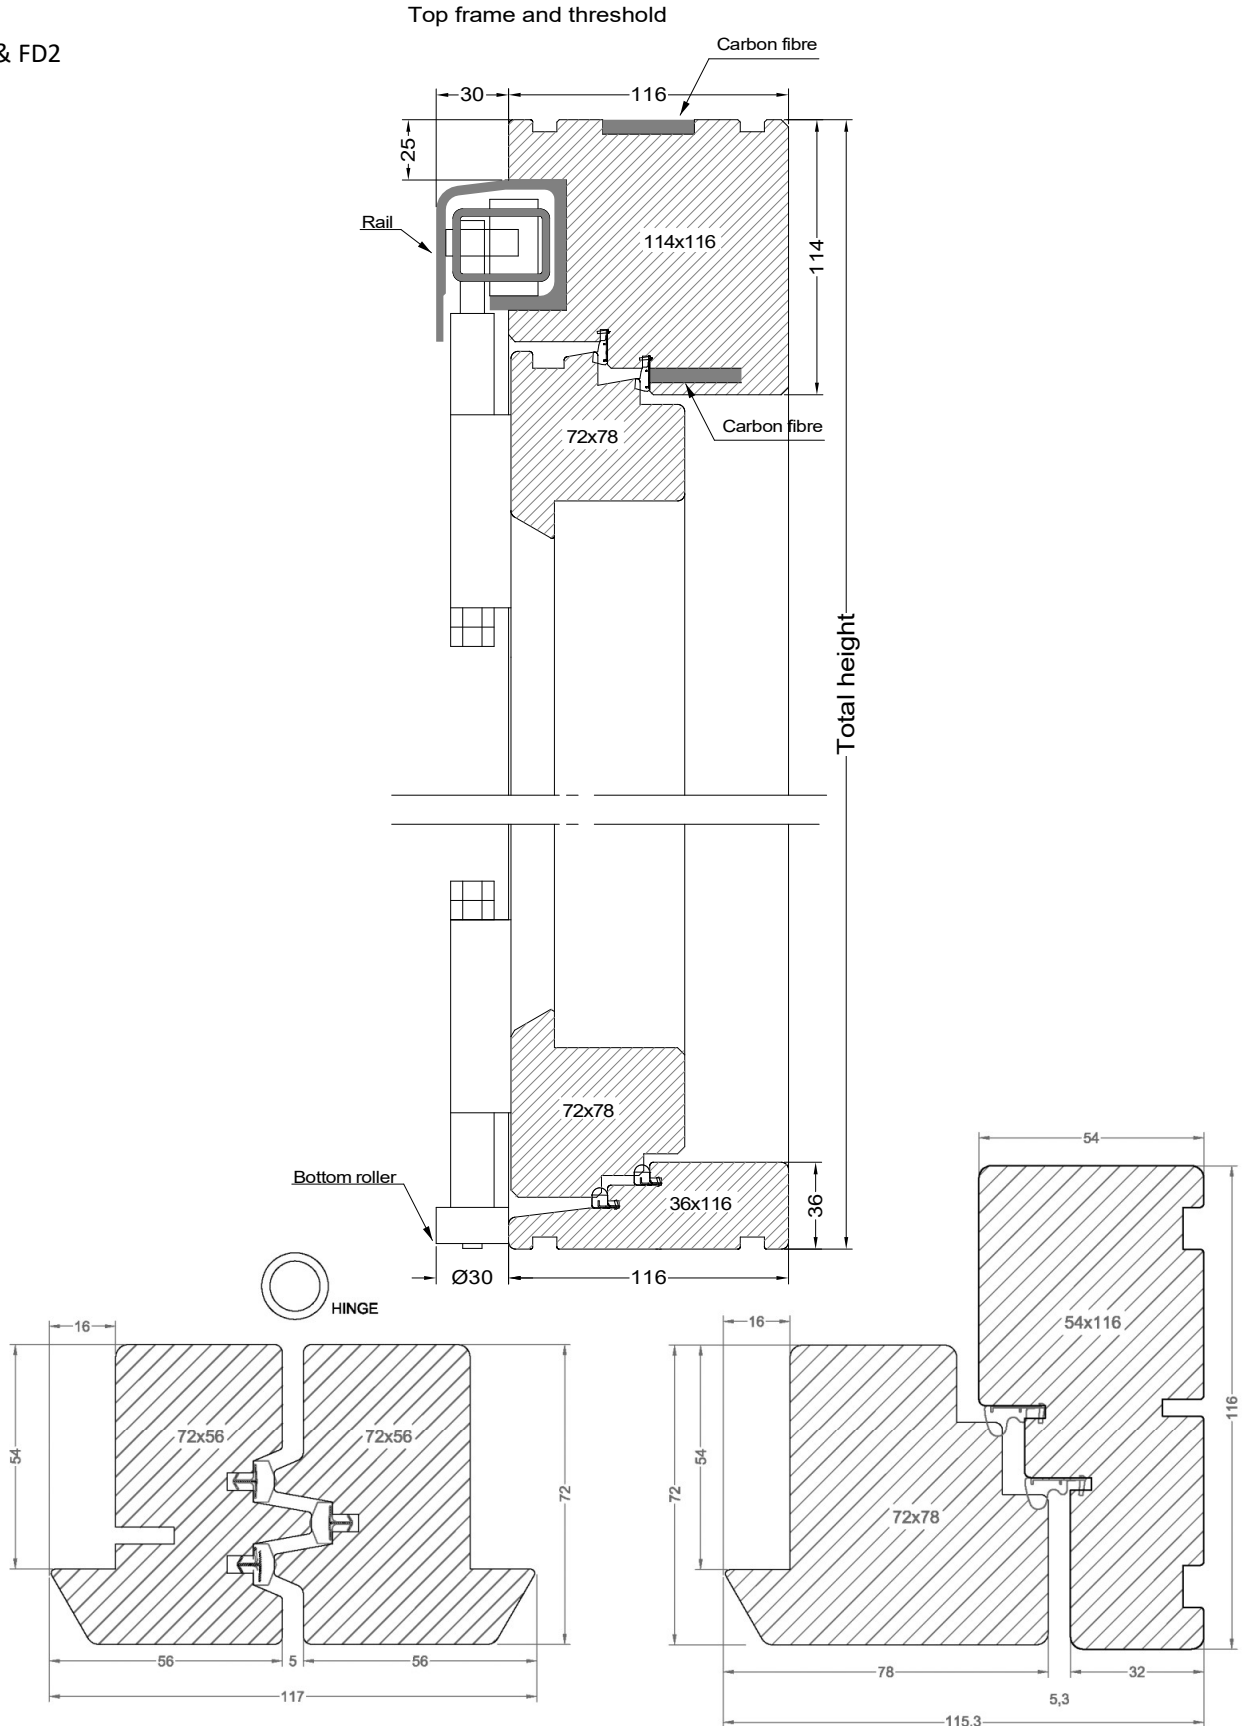

FD3

Top frame and threshold

